



**Technical Service
Information Bulletin**

August 9, 2007

Title:

**FRONT FLOOR UNDER COVER
INSTALLATION DURING PDS**

Models:

'08 LS 460

PRE-DELIVERY SERVICE
PD036-07

Introduction The front floor under cover set (right and left floor under covers) is located in the luggage compartment at the assembly plant to avoid damage during transit.

Install the front floor under covers during Pre-Delivery Service (PDS).

- Applicable Vehicles**
- 2008 model year LS 460 vehicles.

Warranty Information


OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

Installation Procedure

1. Remove the 2 clips from the center floor under cover.

HINT:

Dispose of the original clips. They will NOT be reused.

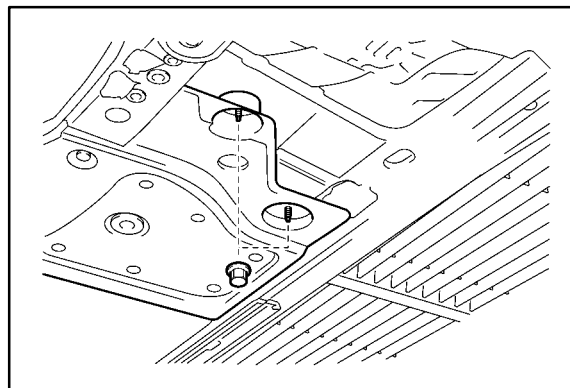

Installation Procedure
(Continued)

2. Install the left side front floor under cover.
 - A. Install the under cover (for front side) and the fender apron with the 2 clips included.

NOTE:

- Install the under cover clips in the holes on the left and right side of the fender apron screw.
- The letters “LH” are on the back of the left side front floor under cover.

- B. Install the under cover (for rear side) with the 2 clips that are included.
3. Repeat step 2 to install the right floor under cover.

