



**Technical Service
Information Bulletin**

September 22, 2006

Title:

**FRONT FLOOR UNDER COVER
INSTALLATION DURING PDS**

Models:

'07 LS 460

PRE-DELIVERY SERVICE
PD070-06
REVISED

TSIB REVISION NOTICE:

- July 19, 2007: The illustration in step 2 has been updated.
- Previous versions of this TSIB should be discarded.

Introduction The front floor under cover set (right and left floor under covers) is located in the luggage compartment at the assembly plant to avoid damage during transit.

Install the front floor under covers during Pre-Delivery Service (PDS)


- Applicable Vehicles**
- 2007 model year **LS 460** vehicles.

Warranty Information

| OP CODE | DESCRIPTION | TIME | OFF | T1 | T2 |
|---------|----------------------------|------|-----|----|----|
| N/A | Not Applicable to Warranty | - | - | - | - |

- Installation Procedure**
1. Remove the 2 clips from the center floor under cover.

HINT:
Dispose of the original clips. They will NOT be reused.

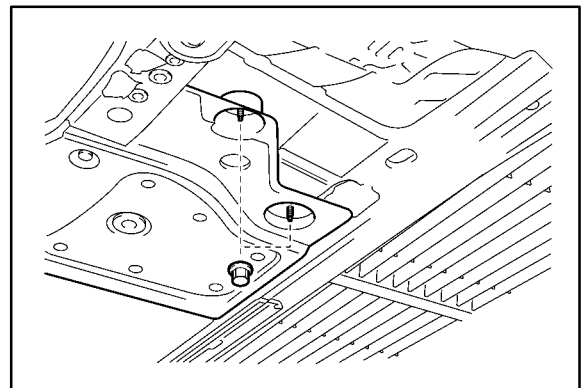

**Installation
Procedure**
(Continued)

2. Install the left side front floor under cover.
 - A. Install the under cover (for front side) and the fender apron with the 2 clips included.

NOTE:

- Install the under cover clips in the holes on the left and right side of the fender apron screw.
- The letter “LH” is on the back of the left side front floor under cover.

- B. Install the under cover (for rear side) with the 2 clips that are included.
3. Repeat step 2 to install the right floor under cover.

